

11/04/99

jc535 U.S. PTO



094346-110499

Please type a plus sign (+) inside this box → ☐Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. XM-0014

First Inventor or Application Identifier P. Marko

Title SYSTEM AND METHOD FOR MULTIPOINT DISTRIBUTION
OF SATELLITE DIGITAL AUDIO RADIO SERVICE

Express Mail Label No. EL321954451US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 15]
(preferred arrangement set forth below)
- Descriptive title of the invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the invention
 - Brief Summary of the invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 5]
4. Oath or Declaration [Total Pages 3]
- a. ☒ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
- i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting
inventor(s) named in the prior application,
see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY
FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT
IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☐ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement (when there is an assignee) ☒ Power of Attorney
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
13. ☐ * Small Entity Statement(s) filed in prior application, Status still proper and desired (PTO/SB/09-12)
14. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
15. ☐ Other: _____

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____ / _____

Prior application information: Examiner _____ Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label _____ or ☒ Correspondence address below
(Insert Customer No. or Attach bar code label here)

Name	Benman & Collins				
Address	2049 Century Park East Suite 2740				
City	Los Angeles	State	CA	Zip Code	90067
Country	USA	Telephone	(310) 553-2400	Fax	(310) 553-2675

Name (Print/Type)	William J. Benman	Registration No. (Attorney/Agent)	29,014
Signature	<i>William J. Benman</i>	Date	11/04/99

Certification under 37 CFR 1.10

Express Mail No. EL321954465US

Date of Deposit: November 04, 1999

I hereby certify that this correspondence is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, DC 20231

Name of person mailing application: Yasmin Emerson

Signature of person mailing application: *Y. Emerson*

EL321954451US

PATENT

XM – 0014

**SYSTEM AND METHOD FOR MULTIPOINT DISTRIBUTION
OF SATELLITE DIGITAL AUDIO RADIO SERVICE**

P. D. Marko

C. Wadin

**SYSTEM AND METHOD FOR MULTIPOINT DISTRIBUTION
OF SATELLITE DIGITAL AUDIO RADIO SERVICE**

5

BACKGROUND OF THE INVENTION

Field of the Invention:

10

The present invention relates to communications systems. More specifically, the present invention relates to satellite digital audio service (SDARS) receiver architectures.

While the present invention is described herein with reference to illustrative embodiments for particular applications, it should be understood that the invention is not limited thereto. Those having ordinary skill in the art and access to the teachings provided herein will recognize additional modifications, applications, and embodiments within the scope thereof and additional fields in which the present invention would be of significant utility.

20

Description of the Related Art:

Satellite radio operators will soon provide digital quality radio broadcast services covering the entire continental United States. These services intend to offer approximately 100 channels, of which nearly 50 channels will provide music with the remaining stations offering news, sports, talk and data channels. According to C. E. Unterberg, Towbin, satellite radio has the capability to revolutionize the radio industry, in the same manner that cable and satellite television revolutionized the television industry.

Satellite radio has the ability to improve terrestrial radio's potential by offering a better audio quality, greater coverage and fewer commercials. Accordingly, in October of

1997, the Federal Communications Commission (FCC) granted two national satellite radio broadcast licenses. The FCC allocated 25 megahertz (MHz) of the electro-magnetic spectrum for satellite digital broadcasting, 12.5 MHz of which are owned by CD Radio and 12.5 MHz of which are owned by the assignee of the present application "XM Satellite Radio Inc." The FCC further mandated the development of interoperable receivers for satellite radio reception, i.e. receivers capable of processing signals from either CD Radio or XM Radio broadcasts. The system plan for each licensee presently includes transmission of substantially the same program content from two or more geosynchronous or geostationary satellites to both mobile and fixed receivers on the ground. In urban canyons and other high population density areas with limited line-of-sight (LOS) satellite coverage, terrestrial repeaters will broadcast the same program content in order to improve coverage reliability. Some mobile receivers will be capable of simultaneously receiving signals from two satellites and one terrestrial repeater for combined spatial, frequency and time diversity, which provides significant mitigation against multipath and blockage of the satellite signals.

In accordance with XM Radio's unique scheme, the 12.5 MHz band will be split into 6 slots. Four slots will be used for satellite transmission. The remaining two slots will be used for terrestrial re-enforcement. Each of two geostationary Hughes 702 satellites will transmit identical or at least similar program content. The signals transmitted with QPSK modulation from each satellite (hereinafter satellite1 and satellite2) will be time interleaved to lower the short-term time correlation and to maximize the robustness of the signal. For reliable reception, the LOS signals transmitted from satellite1 are received, reformatted to Multi-Carrier Modulation (MCM) and rebroadcast by non-line-of-sight (NLOS) terrestrial repeaters. The assigned 12.5 MHz bandwidth (hereinafter the "XM" band) is partitioned into two equal ensembles or program groups A and B. The use of two ensembles allows 4096 Mbits/s of total user data to be distributed across the available bandwidth. Each ensemble will be transmitted

by each satellite on a separate radio frequency (RF) carrier. Each RF carrier supports up to 50 channels of music or data in Time Division Multiplex (TDM) format. With terrestrial repeaters transmitting an A and a B signal, six total slots are provided, each slot being centered at a different RF carrier frequency. The use of two ensembles also allows
5 for the implementation of a novel frequency plan which affords improved isolation between the satellite signals and the terrestrial signal when the receiver is located near the terrestrial repeater.

Although satellite digital audio radio service was originally conceived for reception via a plurality of independently mobile receivers, the need has been recognized
10 in the art for a system and method for distributing satellite digital audio radio service to a plurality of receivers that are not independently mobile relative to each other. One such application, by way of example, might involve the distribution of the SDARS content throughout a passenger airliner. Another application might involve the distribution of SDARS content throughout an office or apartment building.

SUMMARY OF THE INVENTION

20 The need in the art is addressed by the satellite digital audio radio service multipoint distribution system and method of the present invention. Generally, the inventive system comprises a first arrangement for receiving the satellite digital audio radio signal and distributing a converted signal in response thereto. The distributed signal is received by plural receivers each of which provide a respective output signal in
25 response thereto.

In the illustrative embodiment, the first arrangement includes a satellite antenna and a radio frequency (RF) satellite receiver. In the best mode, the RF satellite receiver is

a terrestrial repeater. The repeater decodes a stream of data received from the satellite and recodes the stream using a satellite radio terrestrial broadcast format. In the best mode, the signal is an intermediate frequency signal in the XM radio, multi-carrier modulation (MCM) format.

5 The recoded signal is rebroadcast by the repeater via a distribution network and received by a plurality of intermediate frequency (IF) receivers. The distribution system may be wireless, cable, or fiber optic. In the illustrative embodiment, the IF receivers are modified conventional satellite digital audio radio service receivers. A user interface is provided for each IF receiver to allow for channel selection and audio processing.

10 As an alternative to the repeater, satellite radio signals may be stored in a medium such as a digital video disc and rebroadcast therefrom as disclosed and claimed in copending U.S. patent application serial number _____, filed _____ by C. Wadin and P. Marko and entitled Composite Waveform Storage and Playback (Atty Docket #39253) the teachings of which are incorporated herein by reference.

BRIEF DESCRIPTION OF THE DRAWINGS

20 Fig. 1 illustrates a conventional implementation of a satellite digital audio radio service system architecture.

Fig. 2 is a diagram which illustrates the system of Fig. 1 in greater detail.

Fig. 3 illustrates the satellite digital audio radio service multi-point distribution system architecture of the present invention.

25 Fig. 4 is a block diagram of an illustrative implementation of the multipoint SDARS receiver constructed in accordance with the teachings of the present invention.

Fig. 5 is a functional block diagram illustrating the multipoint receiver of Fig. 4 in detail.

DESCRIPTION OF THE INVENTION

Illustrative embodiments and exemplary applications will now be described with reference to the accompanying drawings to disclose the advantageous teachings of the present invention.

Conventional implementation of a satellite digital audio service (SDARS) system architecture is depicted in Fig. 1. The system 10 includes first and second geostationary satellites 12 and 14 which transmit line-of-sight (LOS) signals to SDARS receivers located on the surface of the earth. The satellites provide frequency and spatial diversity. The system 10 further includes plural terrestrial repeaters 16 which receive and retransmit the satellite signals to facilitate reliable reception in geographic areas where LOS reception from the satellites is obscured by tall buildings, hills, tunnels and other obstructions. The signals transmitted by the satellites 12 and 14 and the repeaters 16 are received by SDARS receivers 20. As depicted in Fig. 1, the receivers 20 may be located in automobiles, handheld or stationary units for home or office use. The SDARS receivers 20 are conventionally designed to receive one or both of the satellite signals and the signals from the terrestrial repeaters and combine or select one of the signals as the receiver output as discussed more fully below.

Fig. 2 is a diagram which illustrates the system 10 of Fig. 1 in greater detail with a single satellite and a single terrestrial repeater. Fig. 2 shows a broadcast segment 22 and a terrestrial repeater segment 24. In the preferred embodiment, an incoming bit stream is encoded into a time division multiplexed (TDM) signal using a coding scheme (such as

5 MPEG) by an encoder 26 of conventional design. The TDM bit stream is upconverted to RF by a conventional quadrature phase-shift keyed (QPSK) modulator 28. The upconverted TDM bit stream is then uplinked to the satellites 12 and 14 by an antenna 30. Those skilled in the art will appreciate that the present invention is not limited to the broadcast segment shown. Other systems may be used to provide signals to the satellites without departing from the scope of the present teachings.

10 The satellites 12 and 14 act as bent pipes and retransmit the uplinked signal to terrestrial repeaters 18 and receivers 20. As illustrated in Fig. 2, the terrestrial repeater 16 includes a receiver demodulator 34, a de-interleaver and reformatter 35, a terrestrial waveform modulator 36 and a frequency translator and amplifier 38. The receiver and demodulator 34 down-converts the downlinked signal to a TDM bitstream. The de-interleaver and reformatter 35 re-orders the TDM bitstream for the terrestrial waveform. The digital baseband signal is then applied to a terrestrial waveform modulator 36 (e.g. MCM or multiple carrier modulator) and then frequency translated to a carrier frequency
15 prior to transmission via a terrestrial antenna 40.

Fig. 3 illustrates the satellite digital audio radio service multi-point distribution system architecture of the present invention. The system 10' includes an antenna 32 for receiving a signal transmitted by the satellite 12. Depending on the application, the antenna 32 may be mounted on an airliner, an office building, an apartment building, or
20 any suitable structure within which or from which multipoint distribution of a receive satellite signal is desired.

In the best mode, the RF signal received by the antenna 32 is provided to a terrestrial repeater 16 which decodes the received satellite data stream and recodes it using an XM radio terrestrial broadcast multi-carrier (MCM) format. MCM is a preferred
25 modulation scheme. The provision of a guard interval with MCM mitigates ISI (inter-symbol interference). With MCM, relatively few carriers will be affected by fading. Accordingly, MCM secures transmission in mobile reception scenarios and is therefore

ideally suited for the task of terrestrial re-broadcasting. Nonetheless, those skilled in the art will appreciate that the invention is not limited to the coding and decoding scheme disclosed herein. Other the coding schemes may be used without departing from the scope of the present teachings.

5 The terrestrial repeater 16 is implemented as shown in Fig. 2. The output of the repeater 16 is an intermediate frequency (IF) signal in the defined XM radio terrestrial broadcast MCM format. This MCM reformatted signal is transported at the terrestrial IF frequency via a network 25 to multiple points within a desired service area. As will be appreciated by those skilled in the art, the distribution network 25 may be wireless, cable,
10 fiber-optic, etc.

 At each reception point, a receiver 20' is provided. As discussed more fully below, each receiver 20' is a modified SDARS receiver which provides a separate user interface to allow for channel selection and audio processing. Consequently, each receiver may be tuned to a separate channel to provide audio and/or visual output.

15 Fig. 4 is a block diagram of an illustrative implementation of the multipoint SDARS receiver 20' constructed in accordance with the teachings of the present invention. With the exceptions of the modifications disclosed herein, in the preferred embodiment, the receiver 20' is an XM satellite receiver such as that disclosed and claimed in copending U.S. patent applications entitled LOW COST INTEROPERABLE
20 SATELLITE DIGITAL AUDIO RADIO SERVICE (SDARS) RECEIVER ARCHITECTURE, filed May 25, 1999 by P. Marko et al., serial no. 09/318,296, (Atty. Docket No. XM 0006) and SATELLITE DIGITAL AUDIO RADIO SERVICE RECEIVER ARCHITECTURE FOR RECEPTION OF SATELLITE AND
25 TERRESTRIAL SIGNALS, filed _____ by P. Marko et al., serial no. _____, (Atty. Docket No. XM 0003) the teachings of both of which are hereby incorporated herein by reference.

As illustrated in Fig. 4, and in accordance with the present teachings, the antenna module and RF tuner module are eliminated. Accordingly, each receiver 20' includes a channel decoder 300, a source decoder 400, a system controller 500, an I²C bus 600, an audio output circuit (not shown), a keypad 900, and a display 1000. An external memory
5 700 serves the channel decoder 300 and external non-volatile random access memory 800 serves the source decoder 400.

The channel decoder 300 is shown as having first and second demodulators for satellite A and satellite B, 302 and 304, respectively. However, in accordance with the present teachings, these elements would not be utilized in the receiver 20'. The
10 demodulator's 302 and 304 are shown to illustrate that a receiver 20' of otherwise conventional design may be utilized in the multipoint distribution system 10' of the present invention.

The IF signal received from the terrestrial repeater 16 is demodulated by a terrestrial demodulator 306. As discussed more fully below, the terrestrial demodulator
15 306 performs multi-carrier (MCM) demodulation and synchronization on the received signal before providing it to a time division demultiplexer 308 for transport layer decoding management.

As shown in Fig. 5, the time-division demultiplexed signal is depunctured and applied to a forward error correcting circuit 310. As is well known in the art,
20 depuncturing involves a selective removal of bits associated with a Viterbi encoded word. The output of the depuncturing circuit 309 is input to a Viterbi decoder 314 in the forward error correcting circuit 310. Thereafter, the received signal is Viterbi decoded, the interleaved (316), and Reed-Solomon decoded (318). Multi-carrier modulation, time-division demultiplexing, depuncturing, Viterbi decoding, de-interleaving and Reed-
25 Solomon decoding are well known in the art.

The output of the Reed-Solomon decoder 318 is provided via a terrestrial/satellite combiner 320 to the source decoder 400 for service layer decoding. In accordance with

present teachings, the satellite A and B signals are not present, accordingly, the terrestrial/satellite combiner 320 is not required and is provided merely to show that a satellite digital audio radio receiver of conventional design may be utilized to practice the teachings of the present invention.

5 The output of a combiner 320 is also provided to a TSCC memory 700. The memory 700 provides time-division demultiplexing configuration data to a channel decoder control unit 312. The channel decoder control unit 312 consists of a number of control and status registers and operates under control of the system controller 500.

Returning to Fig. 4, a user interface is provided via a keypad 900 and a display
10 1000. The user inputs are utilized by the system controller 500 to provide control signals to the channel decoder control unit 312 and the source decoder control unit 402 via an I²C bus 600. I²C buses are well known in the art. I²C transmitter and receiver hardware and software may be acquired from the Philips Corp. for example.

By loading an appropriate control word in a control register in the control unit 312
15 of the channel decoder 300, the system controller effectively configures the channel decoder so that it processes only the terrestrial input received through the demodulator 306.

The source decoder 400 receives a BC (Broadcast Channel) bitstream and control signals from the channel decoder 300 and performs service layer decoding in an SL decoder 404 and decryption in a decrypting circuit 406 in the manner disclosed in the
20 above-referenced patents filed by P. Marco *et al.*, the teachings of which have been incorporated herein by reference. (As is known in the art, the 'Broadcast Channel' is a dedicated TDM stream consisting of a logical grouping of TDM multiplex prime rate channel packets. The Broadcast Channel carries all the information required to
25 demultiplex the TDM stream.) Service layer decoding is facilitated through use of information carried in the Broadcast Information Channel by a control word is stored in a transport layer control register 408 by the system controller to determine which broadcast

channels are demultiplexed. Decryption is facilitated by an encryption key provided by a broadcast authorization channel decoder 410. The decryption is required inasmuch as the satellite signals are transmitted in an encrypted form to limit authorized access.

The decrypted signals are provided to an audio source decoder 420 and a data port 430. The audio source decoder 420 is configured to provide an analog or digital output signal depending upon the application as will be appreciated by those of ordinary skill in the art. The data port 430 is configured to provide digital output data such as may be appropriate for a visual display or any external data device, e.g., laptop.

Those skilled in the art will appreciate that one benefit of using the MCM level, in accordance with present teachings, is that the terrestrial carrier is not deeply interleaved. This lowers the memory requirements for the system.

Thus, the present invention has been described herein with reference to a particular embodiment for a particular application. Those having ordinary skill in the art and access to the present teachings will recognize additional modifications, applications and embodiments within the scope thereof. For example, as an alternative to the repeater, satellite radio signals may be stored in a medium such as a digital video disc and rebroadcast therefrom as disclosed and claimed in copending U.S. patent application serial number _____, filed _____ by C. Wadin and P. Marko and entitled Composite Waveform Storage and Playback (Atty Docket #39253) the teachings of which are incorporated herein by reference.

It is therefore intended by the appended claims to cover any and all such applications, modifications and embodiments within the scope of the present invention.

Accordingly,

WHAT IS CLAIMED IS:

CLAIMS

1. A satellite digital audio radio multipoint distribution system comprising:
first means for providing a satellite digital audio radio signal;
second means for transforming said satellite digital audio radio signal to a converted signal;
third means for distributing said converted signal and
plural fourth means for receiving said distributed converted signal and providing plural output signals in response thereto.
2. The invention of Claim 1 wherein said first means includes a satellite antenna and a satellite receiver.
3. The invention of Claim 2 wherein said first means includes a terrestrial repeater.
4. The invention of Claim 2 wherein said satellite receiver decodes a stream of data received from a satellite and recodes said stream of data using a satellite radio terrestrial broadcast format.
5. The invention of Claim 4 wherein said format is an XM radio format.
6. The invention of Claim 5 wherein said format is multi-carrier modulation.
7. The invention of Claim 6 wherein said converted signal is an XM radio terrestrial intermediate frequency multi-carrier modulated signal.

8. The invention of Claim 1 wherein said first means is a storage medium on which satellite digital audio radio service signals have been stored.

9. The invention of Claim 8 wherein said storage medium is a digital video disc.

10. The invention of Claim 1 wherein each of said plural fourth means includes a respective user interface to allow for channel selection and audio processing.

11. The invention of Claim 1 wherein each of said plural fourth means is a satellite digital audio radio service receiver.

12. The invention of Claim 1 wherein each of said plural fourth means includes a channel decoder adapted to receive said converted signal and provide a digital bitstream output in response thereto.

13. The invention of Claim 12 wherein each of said plural fourth means further includes a source decoder digital signal processor adapted to receive said digital bitstream and provide said output signal in response thereto.

14. The invention of Claim 1 further including a distribution system for connecting said first means to each of said plural fourth means.

15. The invention of Claim 14 wherein said distribution system is a cable distribution system.

16. The invention of Claim 1 wherein said output signal is an audio output signal.

17. A satellite digital audio radio multipoint distribution system comprising:
 a satellite antenna for receiving a satellite digital audio radio signal;
 a terrestrial repeater connected to set antenna for decoding said satellite signal and
 recoding said signal into a satellite radio terrestrial broadcast format;
 a system for distributing recoded signal, and
 plural satellite digital audio radio service receivers adapted to receive said recoded
 signals from said distributing system and provide audio and/or visual output signals in
 response thereto.

18. The invention of Claim 17 wherein said format is an XM radio format.

19. The invention of Claim 18 wherein said format is multi-carrier modulation.

20. The invention of Claim 19 wherein said converted signal is an XM radio
 terrestrial intermediate frequency multi-carrier modulated signal.

21. The invention of Claim 17 wherein each of said plural receivers includes a
 respective user interface to allow for channel selection and audio processing.

22. The invention of Claim 17 wherein each of said plural receivers includes a
 channel decoder integrated circuit adapted to receive said converted signal and provide a
 digital bitstream output in response thereto.

23. The invention of Claim 22 wherein each of said plural receivers further
 includes a source decoder digital signal processor adapted to receive said digital bitstream
 and provide said output signal in response thereto.

24. The invention of Claim 17 wherein said distribution system is a cable distribution system.

25. The invention of Claim 17 wherein said distribution system is a wireless distribution system.

26. The invention of Claim 17 wherein said distribution system is a fiber-optic distribution system.

27. The invention of Claim 17 wherein said output signal is an audio output signal.

28. A method for distributing a satellite digital audio radio signal to multiple receivers including the steps of:

receiving a satellite digital audio radio signal and distributing a converted signal in response thereto and

receiving said distributed downconverted signal via plural receivers and providing plural output signals in response thereto.

ABSTRACT OF THE DISCLOSURE

A satellite digital audio radio service multipoint distribution system and method. The system comprises a satellite antenna and a satellite receiver for receiving a satellite digital audio radio signal and distributing a converted signal in response thereto. The distributed signal is received by plural receivers each of which provide a respective output signal in response thereto. In the best mode, the satellite receiver is a terrestrial repeater. The repeater decodes a stream of data received from the satellite and recodes the stream using a satellite radio terrestrial broadcast format. In the best mode, the signal is an intermediate frequency signal in the XM radio, multi-carrier modulation format. The recoded signal is rebroadcast by the repeater via a distribution network and received by a plurality of intermediate frequency (IF) receivers. The distribution system may be wireless, cable, or fiber optic. In the illustrative embodiment, the IF receivers are modified conventional satellite digital audio radio service receivers. A user interface is provided for each IF receiver to allow for channel selection and audio processing.


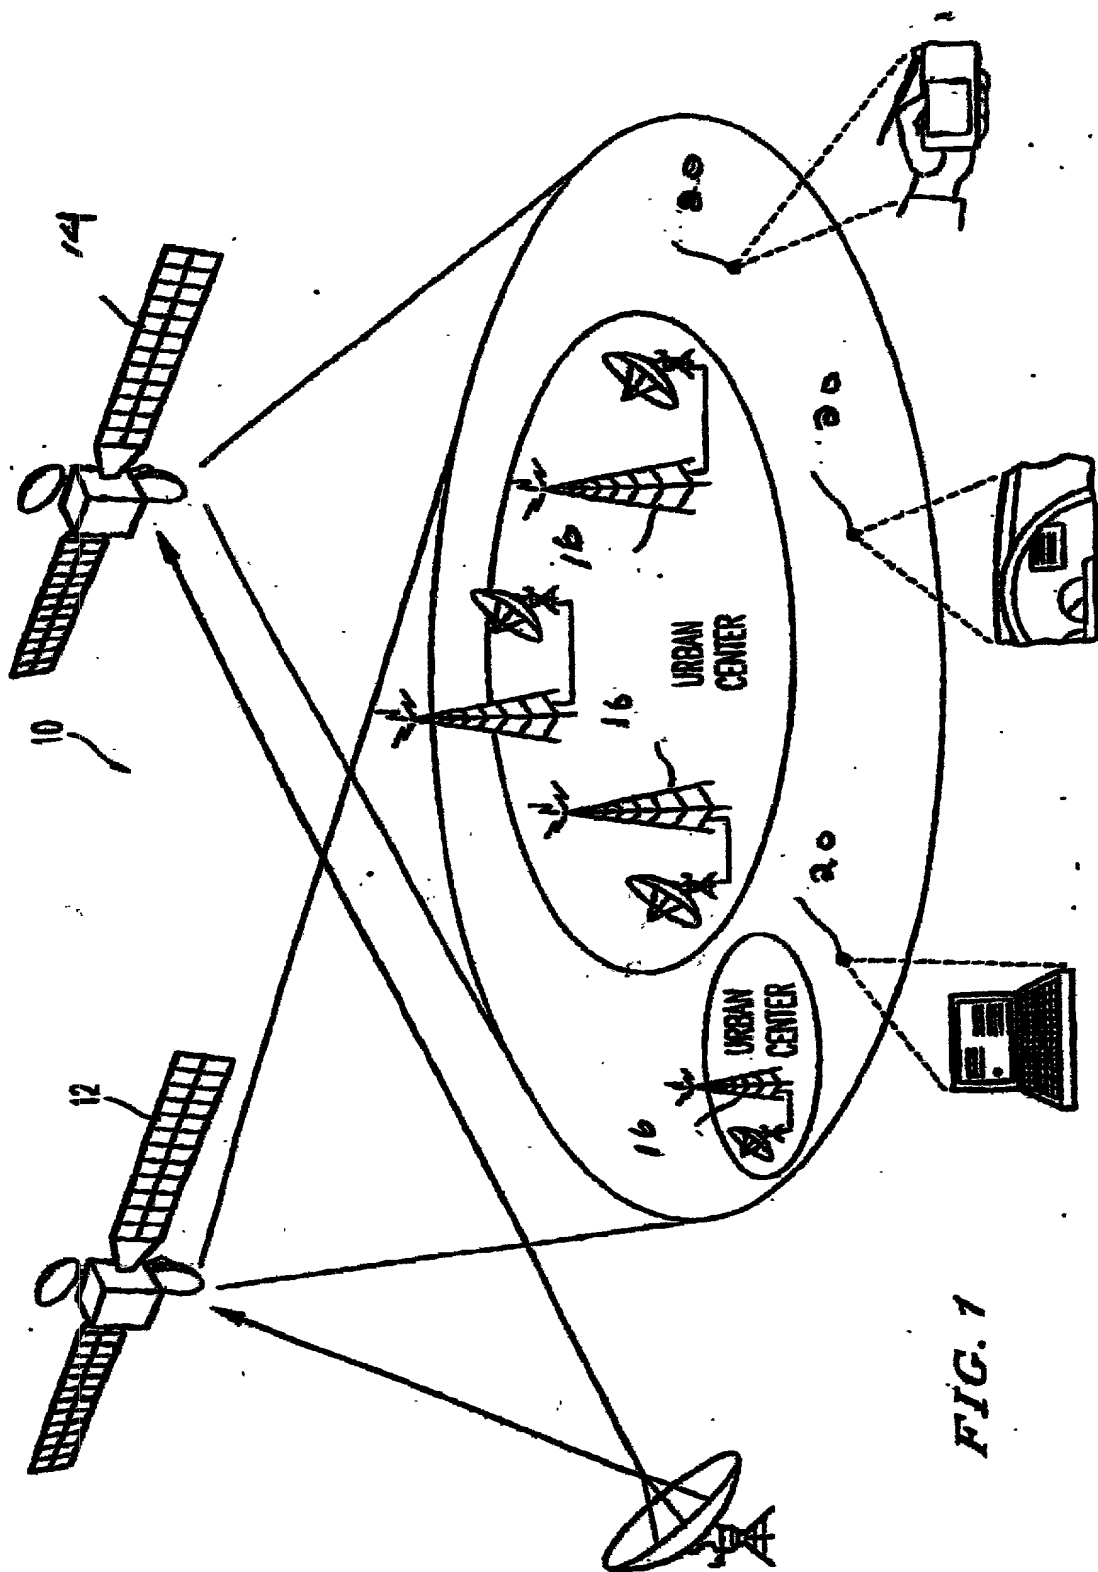


FIG. 1

FIG. 3

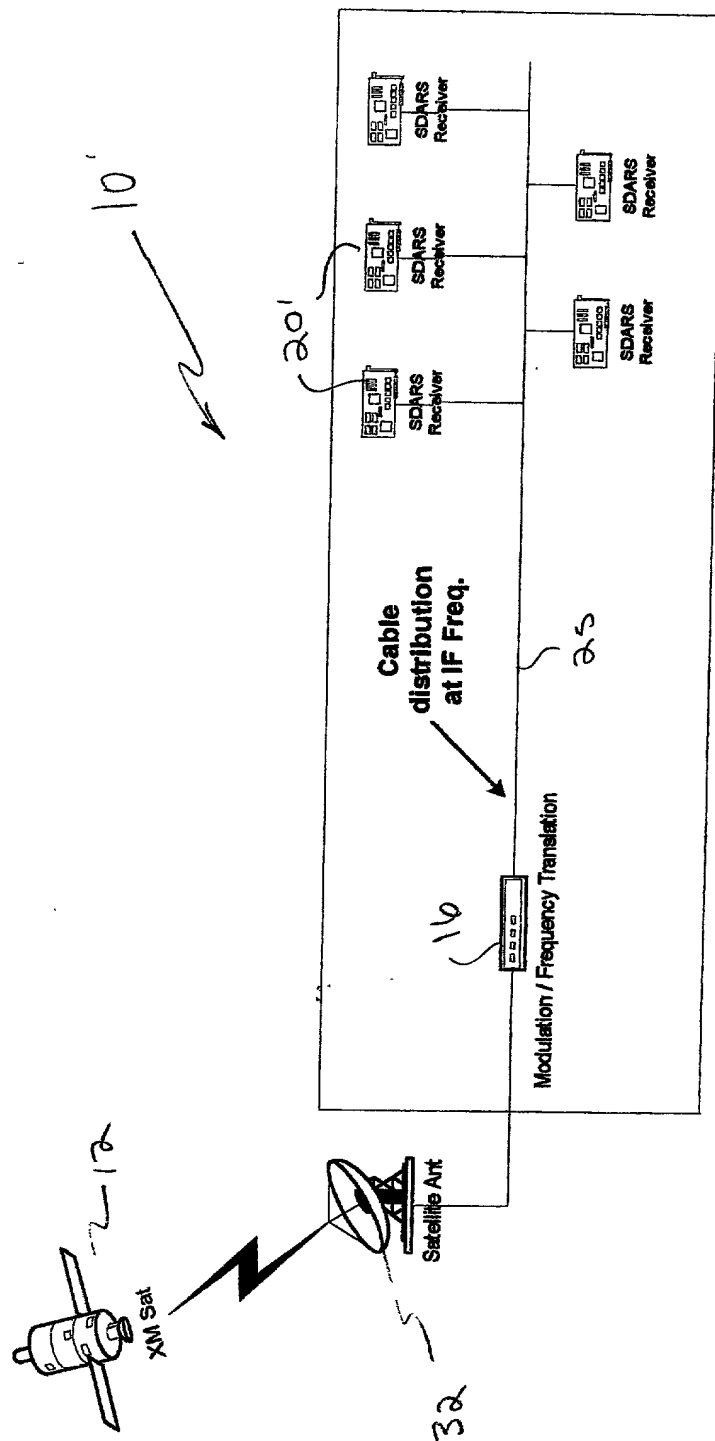

٥١٧


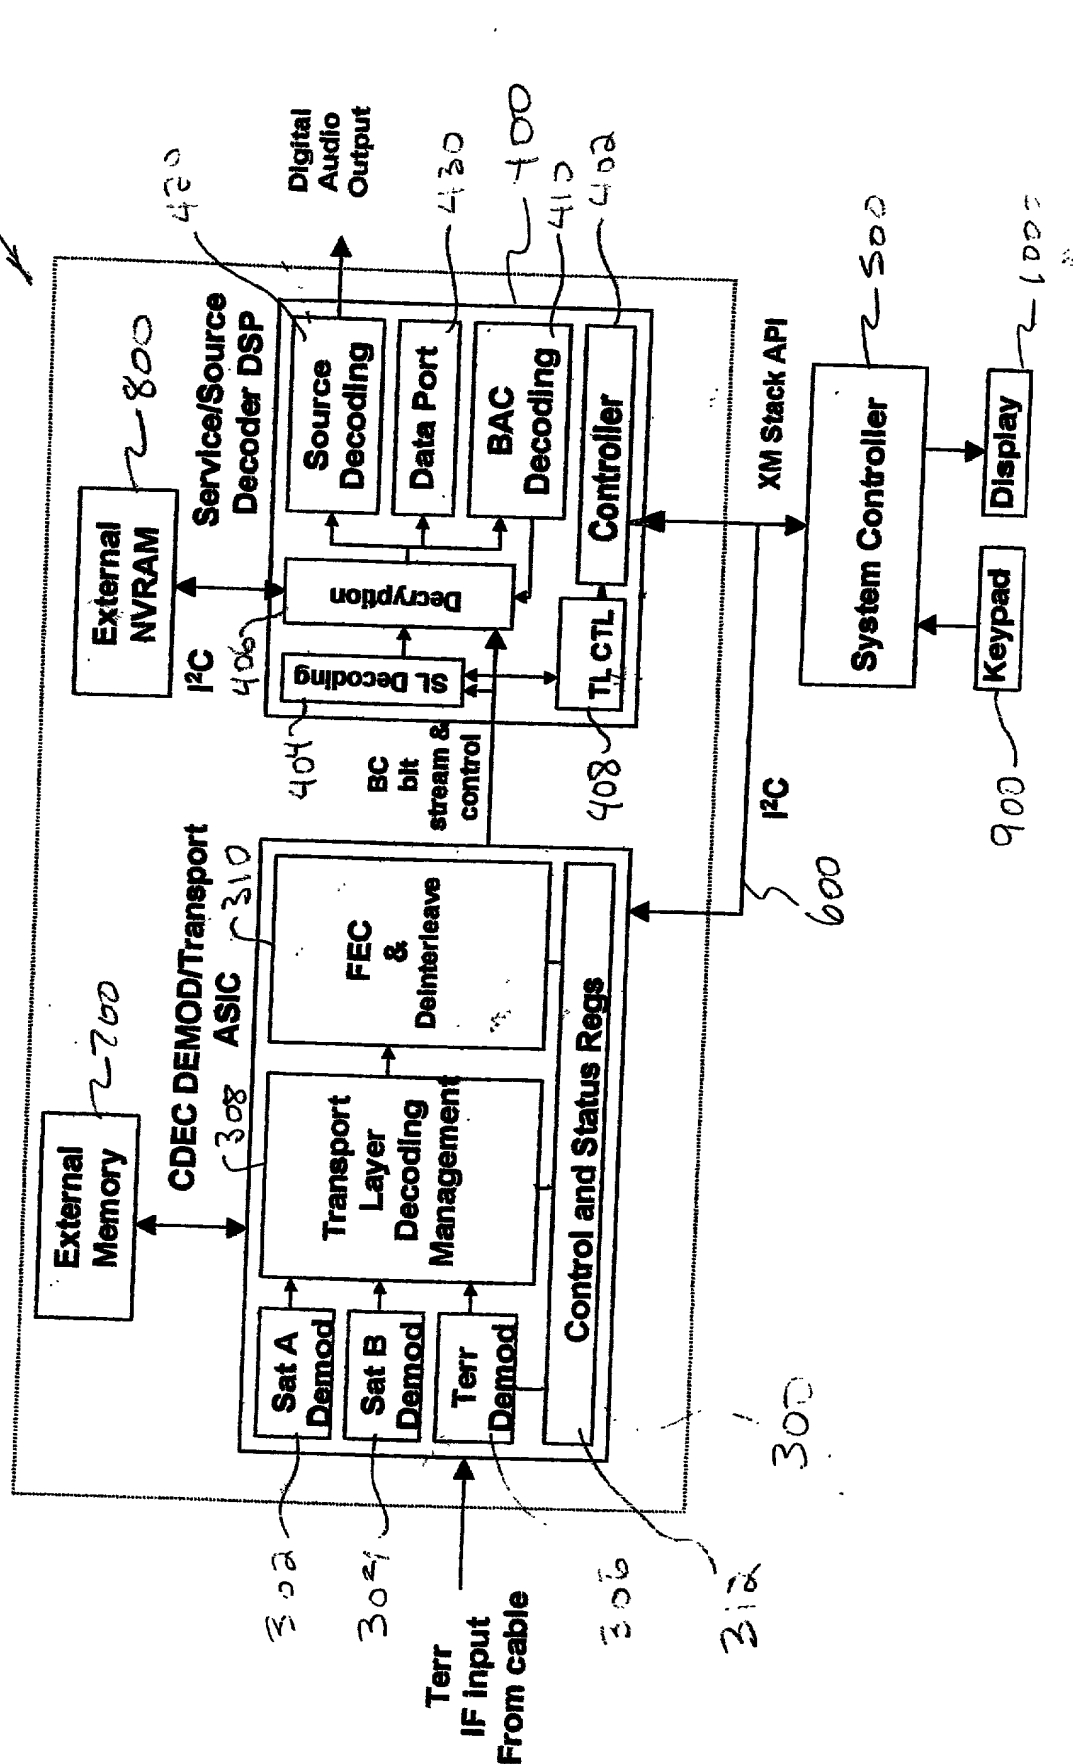


FIG. 5

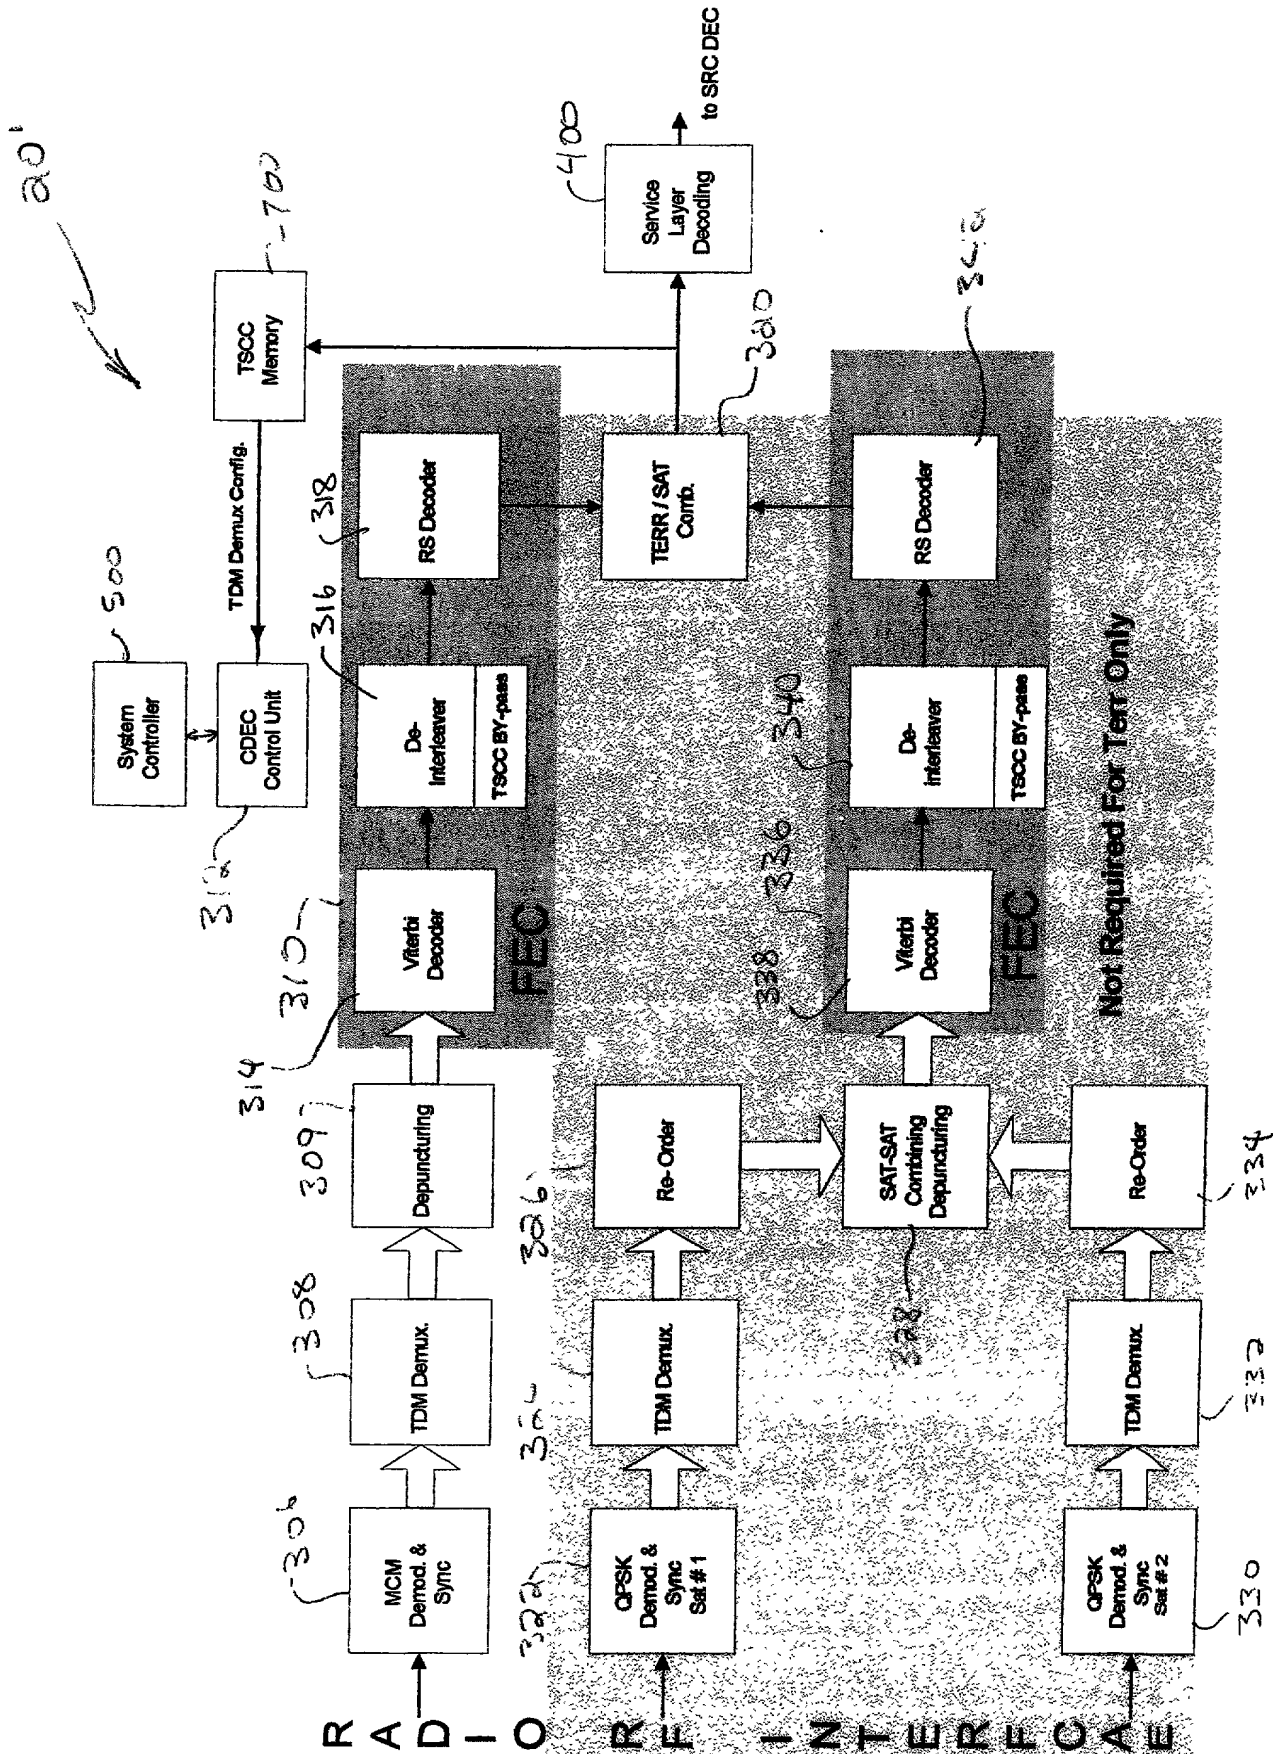

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63) <input checked="" type="checkbox"/> Declaration Submitted with Initial Filing OR <input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)	Attorney Docket Number	XM-0014
	First Named Inventor	P.D. Marko
	COMPLETE IF KNOWN	
	Application Number	/
	Filing Date	
	Group Art Unit	
	Examiner Name	

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

SYSTEM AND METHOD FOR MULTIPOINT DISTRIBUTION OF SATELLITE DIGITAL AUDIO RADIO SERVICE

the specification of which (Title of the Invention)

☒ is attached hereto
OR
☐ was filed on (MM/DD/YYYY) as United States Application Number or PCT International Application Number and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)

☐ Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☐ Customer Number OR
☒ Registered practitioner(s) name/registration number listed below

Place Customer Number Bar Code Label here

Name	Registration Number	Name	Registration Number
William J. Benman	29,014		

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☐ Customer Number OR ☒ Correspondence address below

Name	William J. Benman				
Address	Benman & Collins				
Address	2049 Century Park East, Suite 2740				
City	Los Angeles	State	CA	ZIP	90067
Country	USA	Telephone	(310) 553-2400	Fax	(310) 553-2675

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:		<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])		Family Name or Surname			
Paul D.		Marko			
Inventor's Signature				Date	
Residence: City	Pembrone Pines	State	FL	Country	US
Post Office Address	6320 S.W. 6th Street				
Post Office Address					
City	Pembrone Pines	State	FL	ZIP	33023
				Country	US

☒ Additional inventors are being named on the 1 supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

Please type a plus sign (+) inside this box → ☐

PTO/SB/02A (3-97)
Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

+

DECLARATION

ADDITIONAL INVENTOR(S) Supplemental Sheet Page 1 of 1

Name of Additional Joint Inventor, if any:		<input type="checkbox"/> A petition has been filed for this unsigned inventor					
Given Name (first and middle [if any])				Family Name or Surname			
Craig				Wadin			
Inventor's Signature						Date	
Residence: City	Sunrise	State	FL	Country	US	Citizenship	US
Post Office Address		11015 NW 27th Street					
Post Office Address							
City	Sunrise	State	FL	ZIP	33322	Country	US
Name of Additional Joint Inventor, if any:		<input type="checkbox"/> A petition has been filed for this unsigned inventor					
Given Name (first and middle [if any])				Family Name or Surname			
Inventor's Signature						Date	
Residence: City		State		Country		Citizenship	
Post Office Address							
Post Office Address							
City		State		ZIP		Country	
Name of Additional Joint Inventor, if any:		<input type="checkbox"/> A petition has been filed for this unsigned inventor					
Given Name (first and middle [if any])				Family Name or Surname			
Inventor's Signature						Date	
Residence: City		State		Country		Citizenship	
Post Office Address							
Post Office Address							
City		State		ZIP		Country	

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

+